

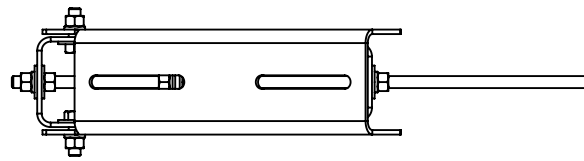
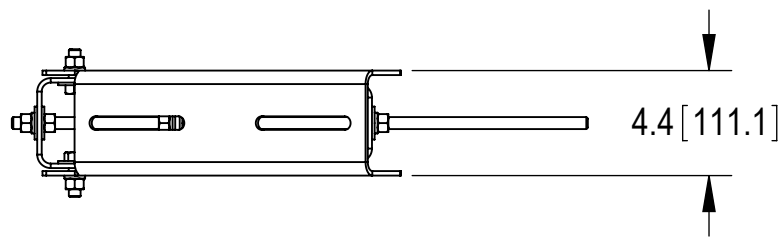
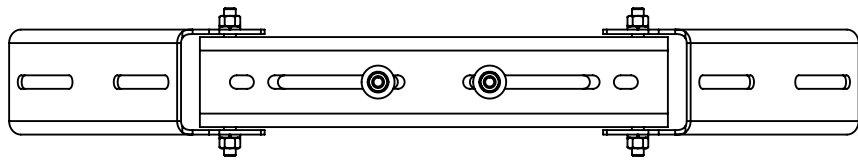
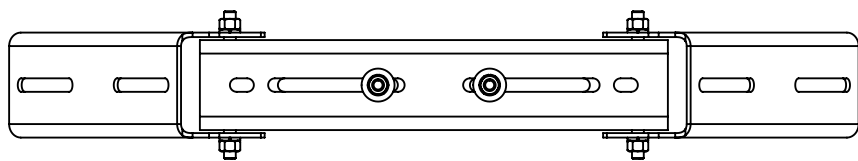


- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 2.1 ANY HAZARDS OR OBSTRUCTIONS TO THE CLIMBING FACILITY AND SAFETY CLIMB MUST BE IDENTIFIED PRIOR TO INSTALLING THE APPURTENANCE. ADDITIONAL PRODUCTS MAY BE REQUIRED TO MAINTAIN THE INTEGRITY OF THE SAFETY CLIMB. DURING INSTALLATION, TEMPORARY AND/OR PERMANENT PRECAUTIONARY MEASURES SHOULD BE TAKEN TO PRESERVE THE CLIMBING FACILITY AND/OR SAFETY CLIMB.
- 2.2 FITS TOWER LEGS UP TO 5-5/8" OD, 6" 60° AND 8" 90° ANGLE.
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS 3/8" OR LARGER SECURING FLAT PLATES SNUG TIGHT. TIGHTEN ALL THREADED RODS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THREADED ROD.
- 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
- 3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

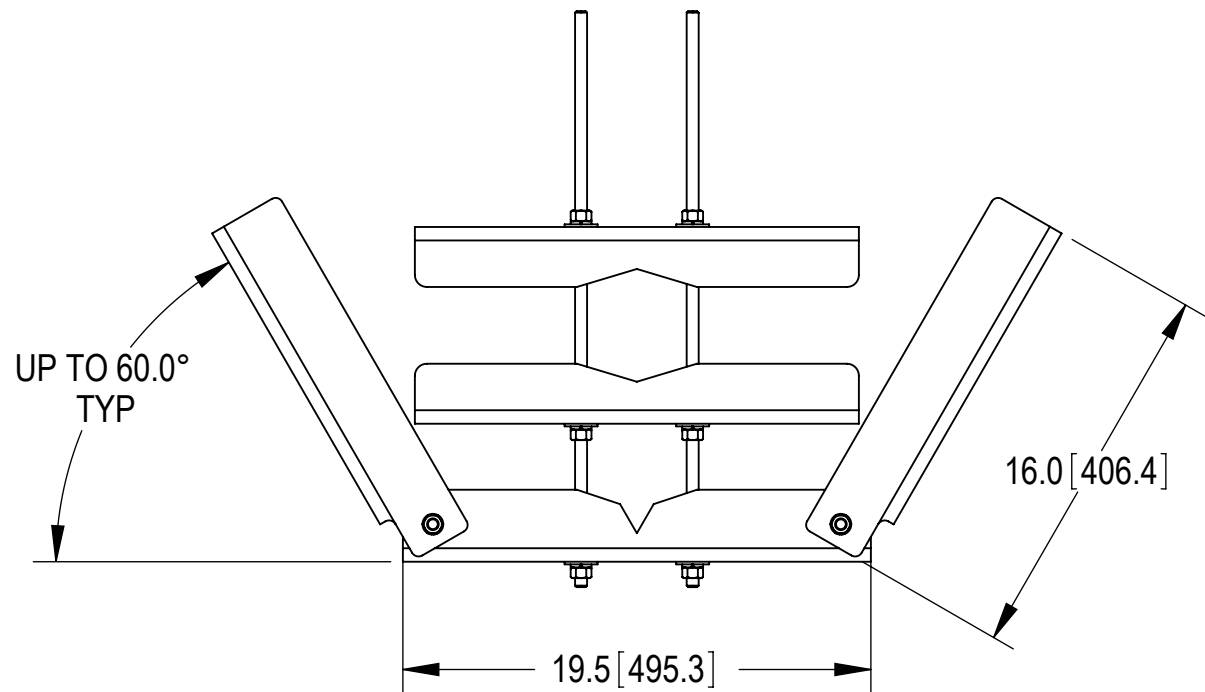

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	MSM 29NOV11	TP
B	UPDATED DRAWING FORMAT	NSUN 06JAN26	BA1025 50106431AMO

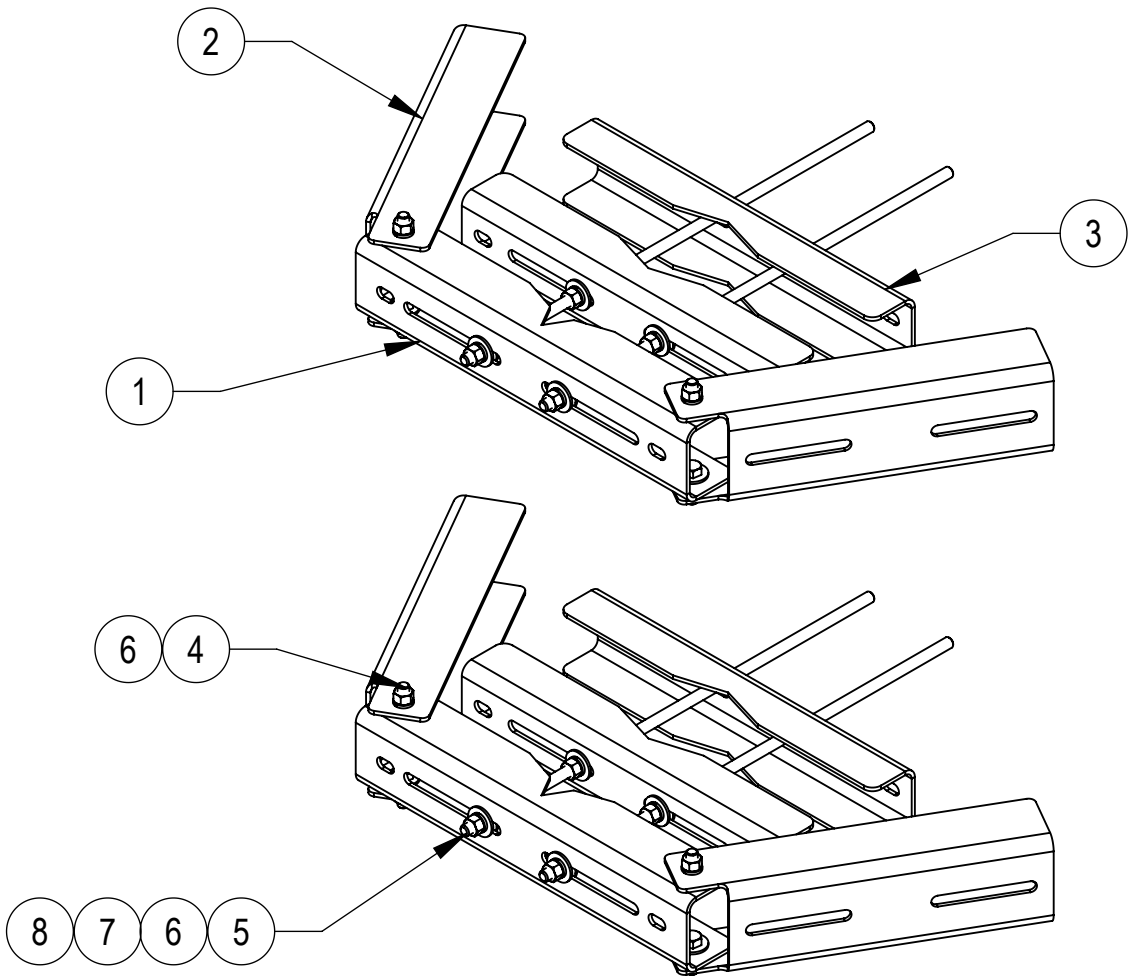

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	PMRU01	PM-RU CHANNEL LEG	2	8.43 LBS	
2	PMRU02	CHANNEL PIVOT BRACKET	4	7.64 LBS	
3	PMRU03	UNIVERSAL BACK CHANNEL	4	6.74 LBS	
4	GB-04145	1/2" X 1-1/2" GALV BOLT KIT	8	0.13 LBS	
5	MT37924	1/2" X 24" GALV THREADED ROD	4	1.33 LBS	
6	GWf-04	1/2" GALV FLAT WASHER	28	0.04 LBS	
7	GWL-04	1/2" GALV LOCK WASHER	16	0.01 LBS	
8	GN-04	1/2" GALV HEX NUT	20	0.04 LBS	

DENSITY	83.30	lbs/in³
MASS	295.62	lbs
VOLUME	3344.05	in³
SURFACE AREA	3344.05	in²
HEIGHT	30.2"	
LENGTH	35.4"	
WIDTH	24.0"	

**ANDREW**® an Amphenol company

TOLERANCES		SAP MATERIAL MASTER						
1 PLACE .X[X] ± 0.12[3.0]	3 PLACE .XXX[X] ± 0.03[0.8]	PM-RU3T						
2 PLACE .XX[X] ± 0.06[1.5]	ANGLES ± 2°							
FINISH		MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	TITLE PIPE MOUNT RRU KIT W/ TAPER				
		CE MSM	29NOV11					
		RW NSUN	01/08/2026					
		AD YMENG	01/08/2026					
		RE YMENG	01/08/2026	SCALE 1:1		DOCUMENT NO. PM-RU3T		
ECN 50106431AMO								
SIZE	Auth Group	INSL	MODEL		DRAWING		SHEET 1 OF 1	
C			VERSION	STATUS	REVISION	VERSION		STATUS
			01	RE	B	01	RE	B

Confidential