
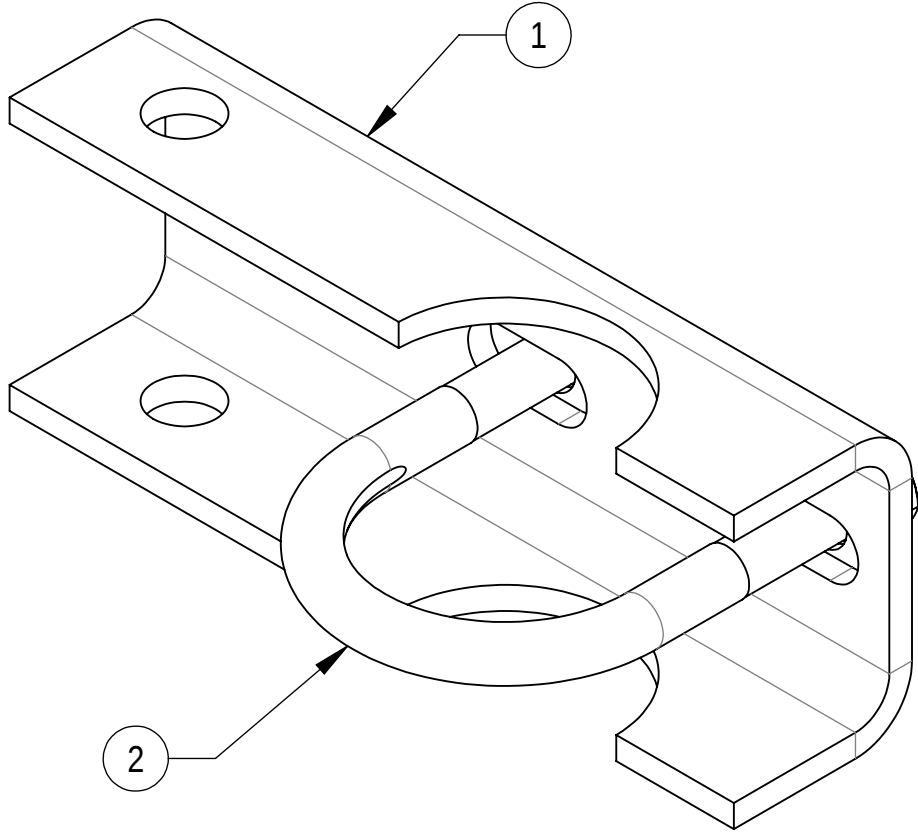
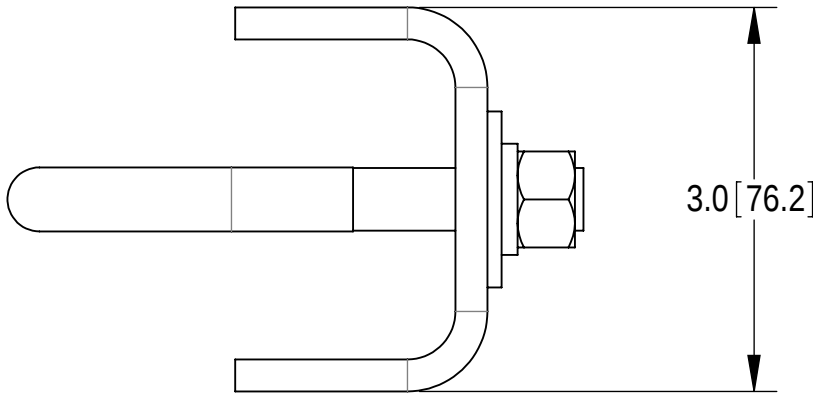
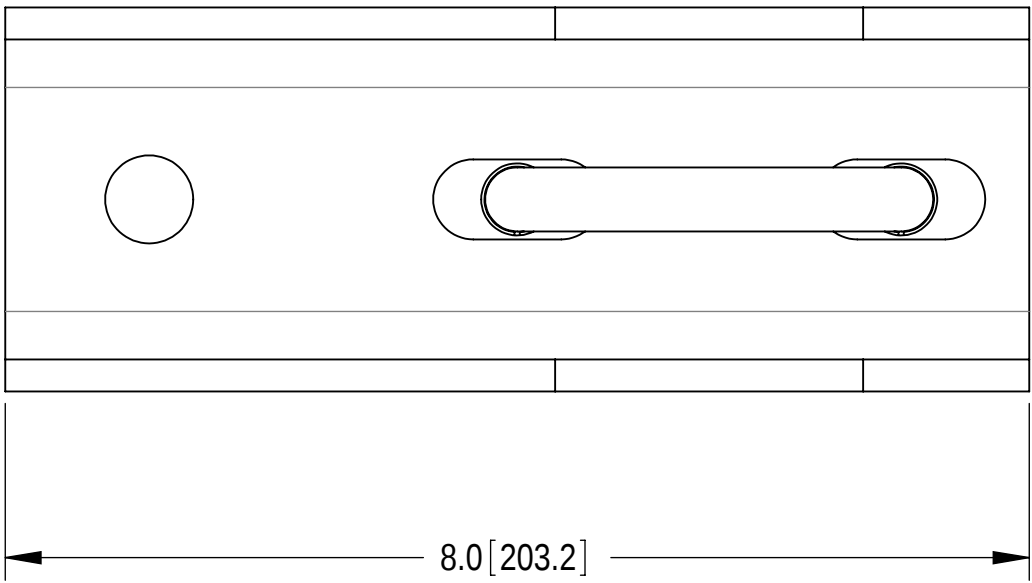


- 4
- 3
- 2
- 1
- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL U-BOLTS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF U-BOLT.
- 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

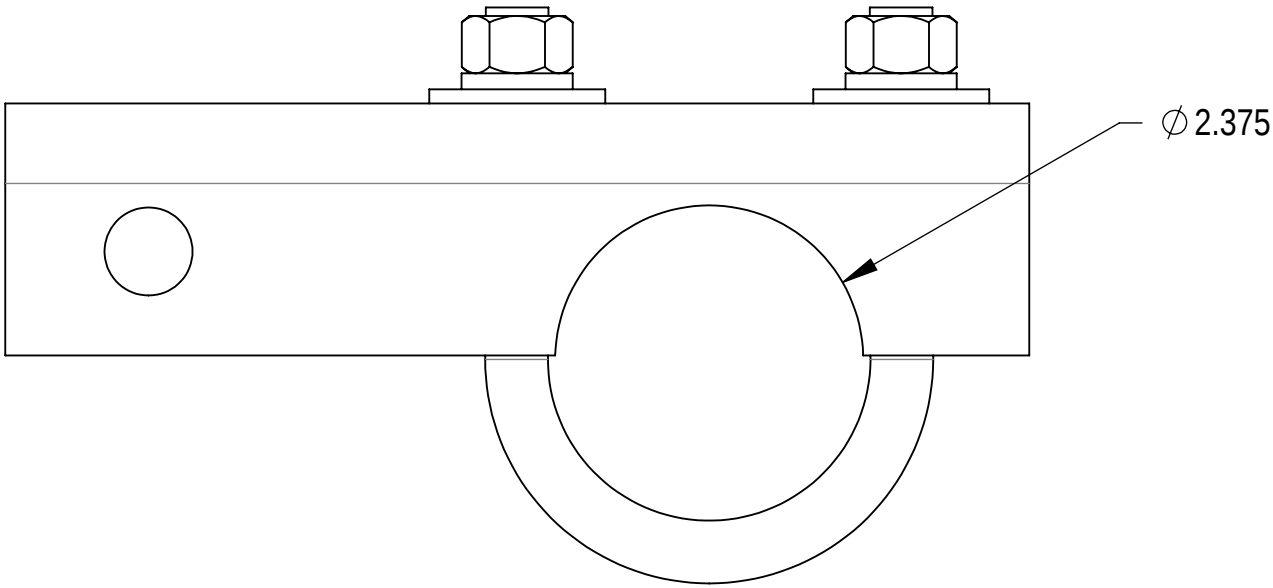

4

3

2

1

A

CONFIDENTIAL

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	TFMSS01	TOWER FACE MOUNT STIFFARM BRACKET	1	2.90 LBS	
2	GUB-4240	1/2" X 2-1/2" X 4" GALV U-BOLT	1	0.56 LBS	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	MSB 17MAY11	TP
B	UPDATED DRAWING FORMAT	NSUN 15JAN26	BA1025 50106613AMO

ANDREW[®] an Amphenol company											
TOLERANCES						SAP MATERIAL MASTER					
1 PLACE .X[X] ± 0.12[3.0]			3 PLACE .XXX[X] ± 0.030[0.8]			TF-MSS-BK2					
2 PLACE .XX[X] ± 0.06[1.5]			ANGLES ± 2°								
FINISH					MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	TITLE STIFF-ARM ATTACHMENT BRACKET							
	CE	MSB	17MAY11								
	RW	NSUN	01/15/2026								
				SCALE 2:3							
	AD	YMENG	01/21/2026								
	RE	YMENG	02/04/2026	DOCUMENT NO. TF-MSS-BK2							
	ECN 50106613AMO										
SIZE	Auth Group	INSL	MODEL			DRAWING			SHEET 1 OF 1		
C			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION			
			01	RE	B	01	RE	B			