

4


3

2

1

- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD.
- TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 3.2 ALL THE THREADED RODS ARE INSTALLED ACCORDING TO THE ACTUAL MONOPOLE DIAMETER.
- THE LENGTH THAT WILL INTERFERE WITH THE RING MOUNT OR OTHERS PART OF PLATFORM NEED TO BE CUT OFF.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

REVISIONS				
REV.	ECN	DESCRIPTION	BY	DATE
A	10786	INITIAL RELEASE	MAC	08/26/2021

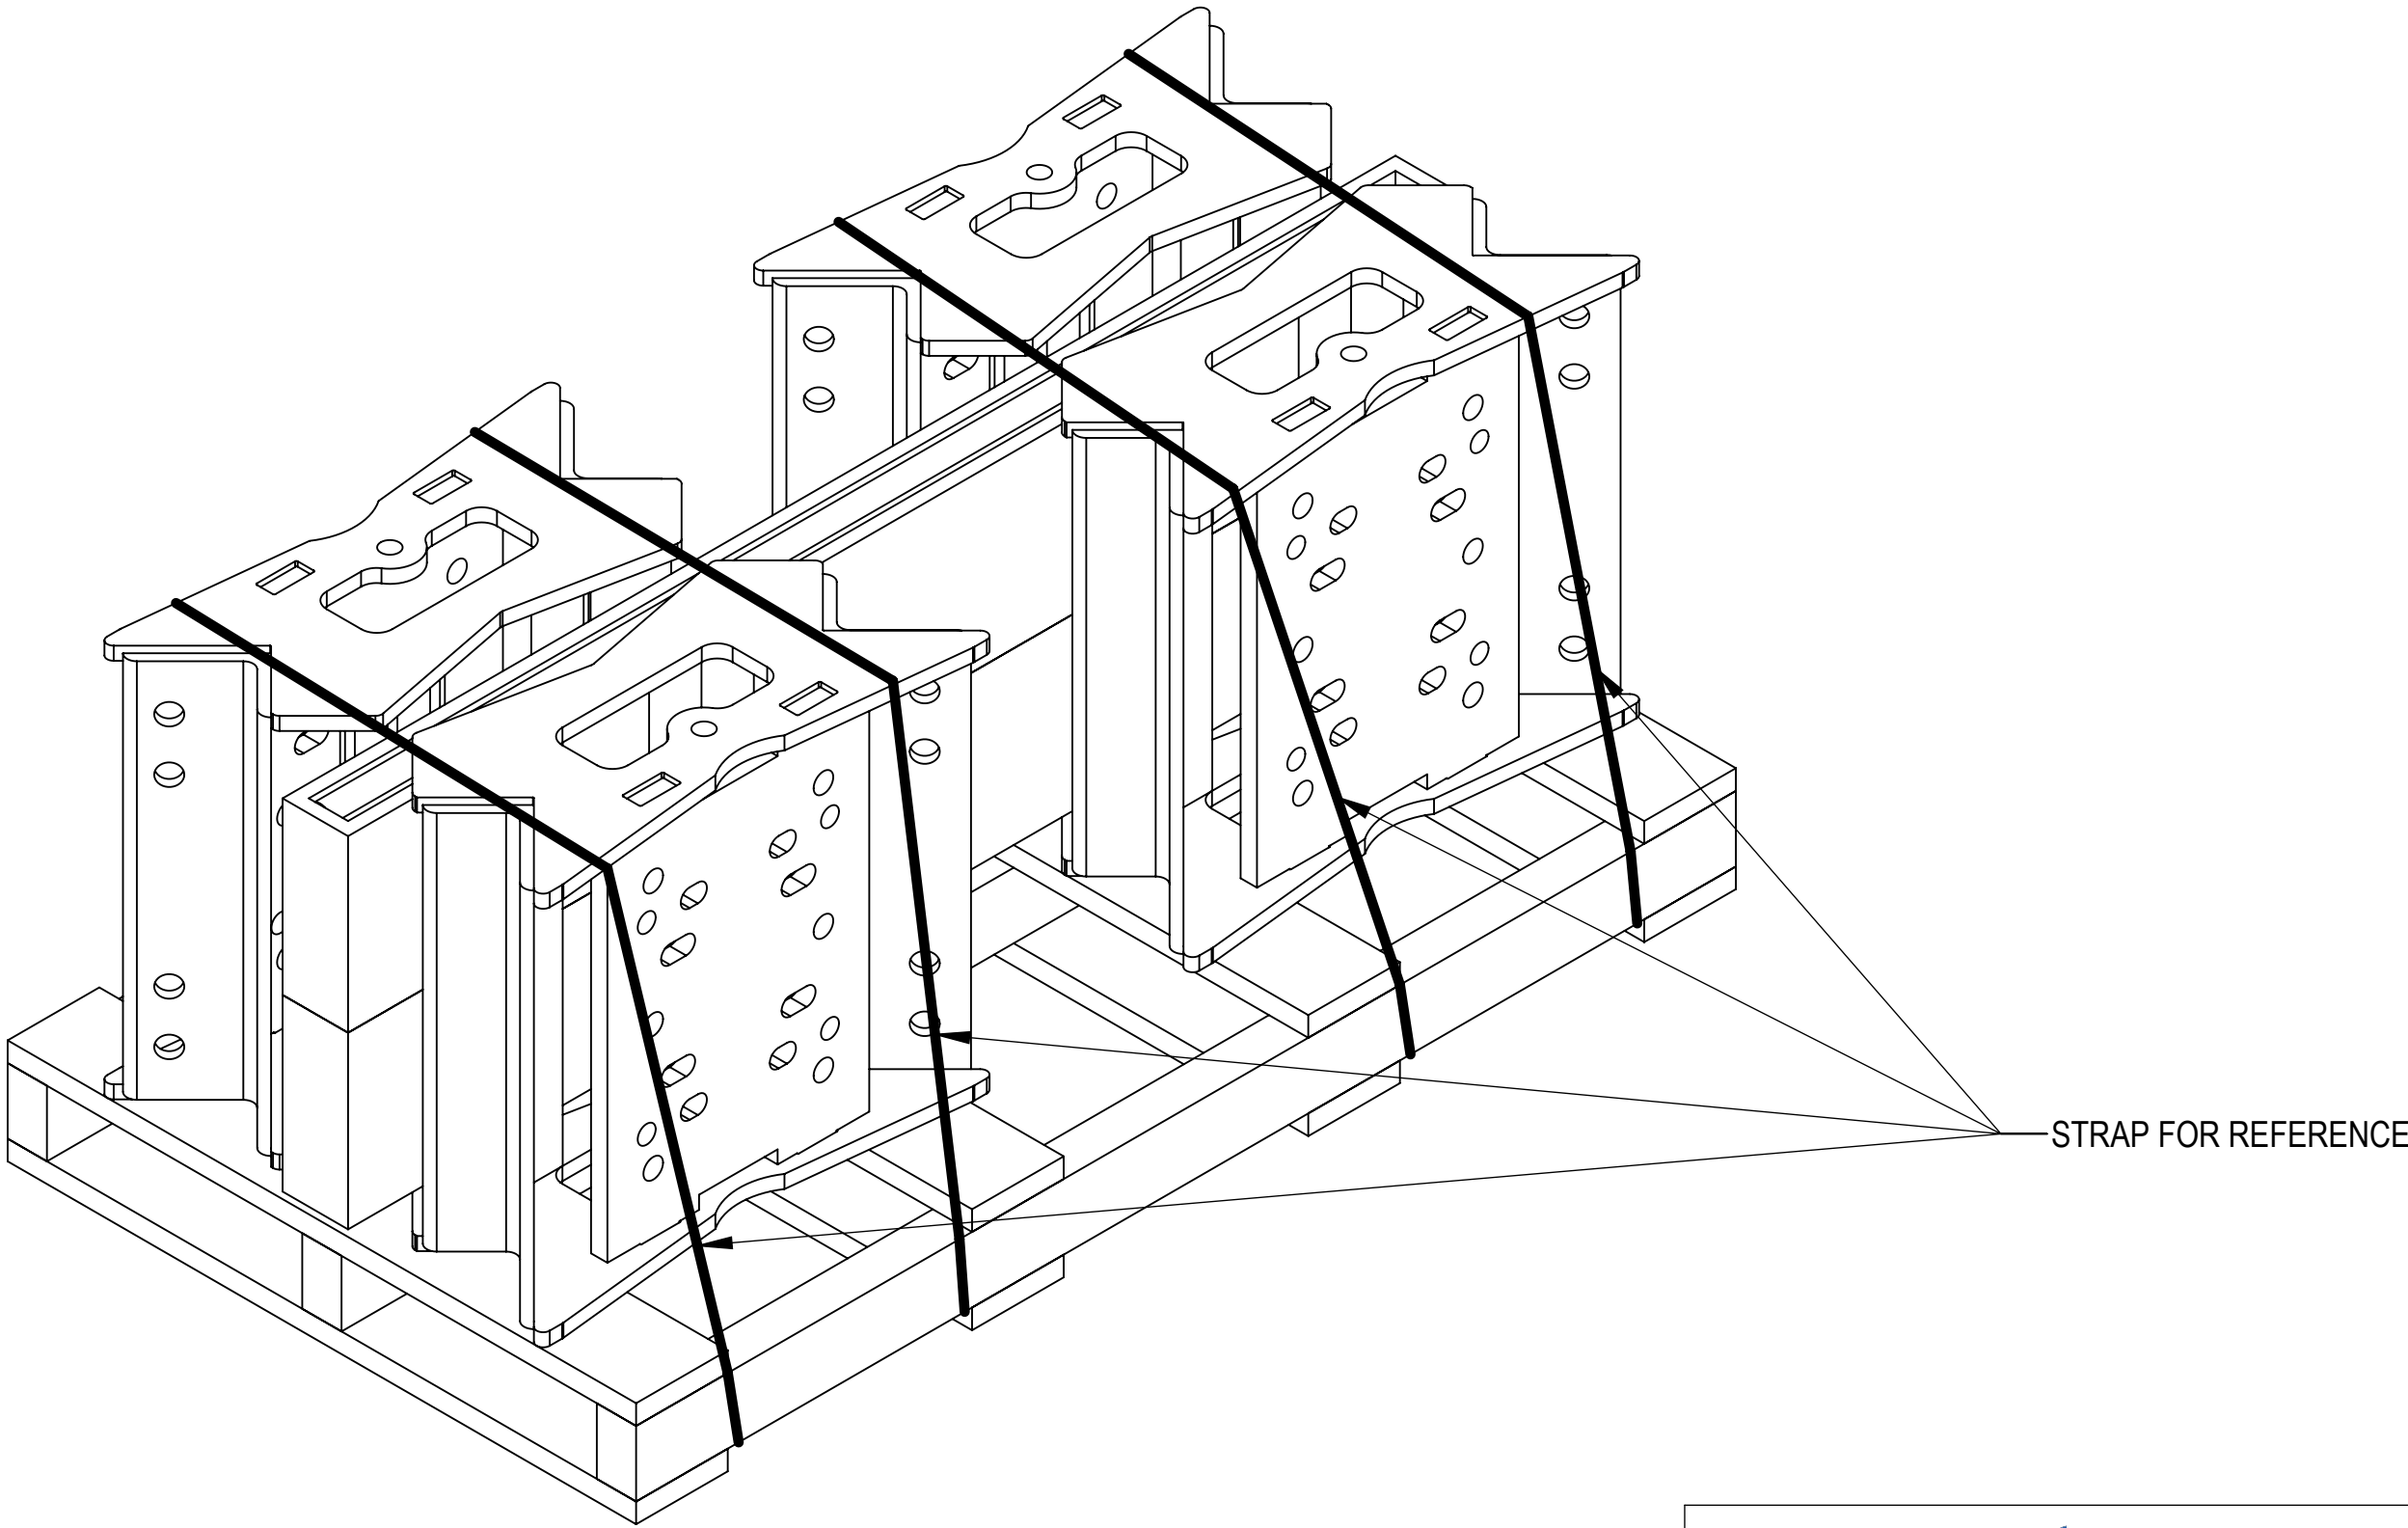

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	RMLPALLET	42 X 24 PALLET FOR LARGE RINGMOUNTS	1	11.99 LBS	
2	RMHD1545-4-1000	WELDMENT, 15"-45" HEAVY DUTY RING MOUNT	4	75.24 LBS	
3	RMHD1545-4-HK01	15"-45" RING MOUNT HARDWARE KIT	2	46.14 LBS	

DENSITY	405.21	lbs/in³
MASS		lbs
VOLUME	2979.02	in³
SURFACE AREA	12451.68	in²
HEIGHT		
LENGTH		
WIDTH		

**ANDREW**[®] an Amphenol company

TOLERANCES		SAP MATERIAL MASTER							
1 PLACE .X[X] ± 0.25[6.3]	3 PLACE .XXX[X] ± 0.06[1.5]	MC-RMHD-1545-4							
2 PLACE .XX[X] ± 0.12[3.0]	ANGLES ± 0.5°								
FINISH		MATERIAL							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.3M-1994	NAME	DATE	TITLE 4 SECTOR RING MOUNT, 15"-45" POLE						
	CE MAC	08/26/2021							
	RW LL 1090	07/15/2025							
	AD YMENG	07/15/2025							
	RE YMENG	07/15/2025							
ECN 10786PC			SCALE 1:8	DOCUMENT NO. MC-RMHD-1545-4					
SIZE	Auth Group	INSL							
C			MODEL			DRAWING			SHEET 1 OF 2
			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION	
			00	RE	A	00	RE	A	

Confidential

4

3

2

1

