

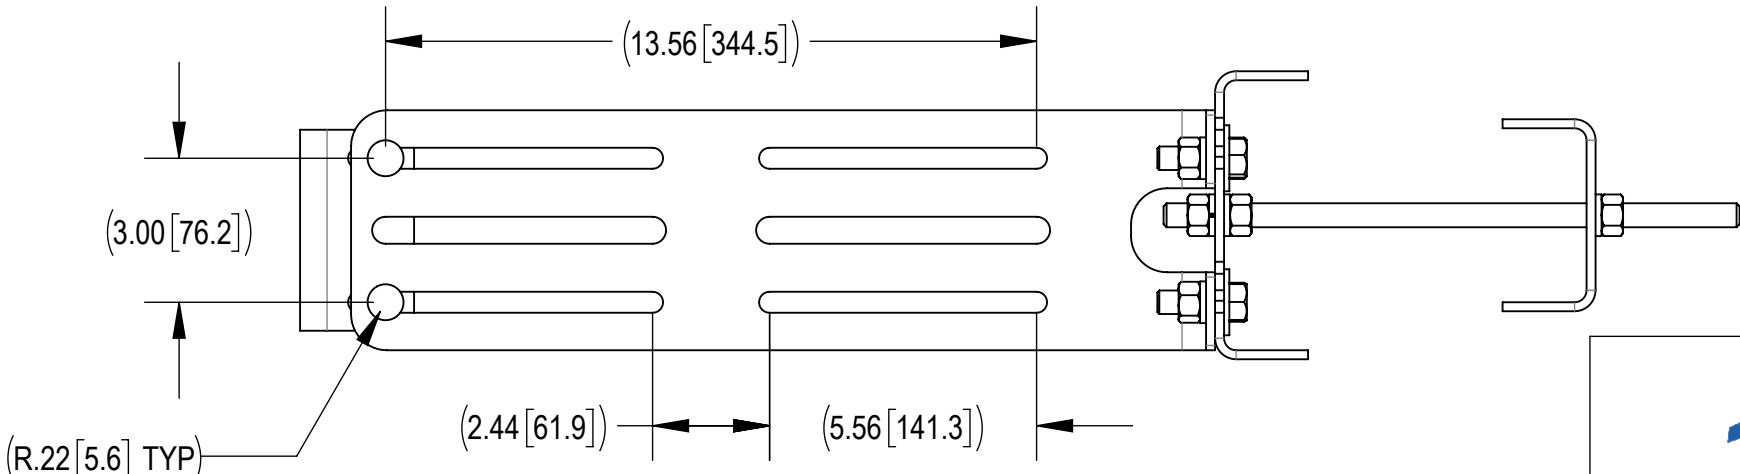
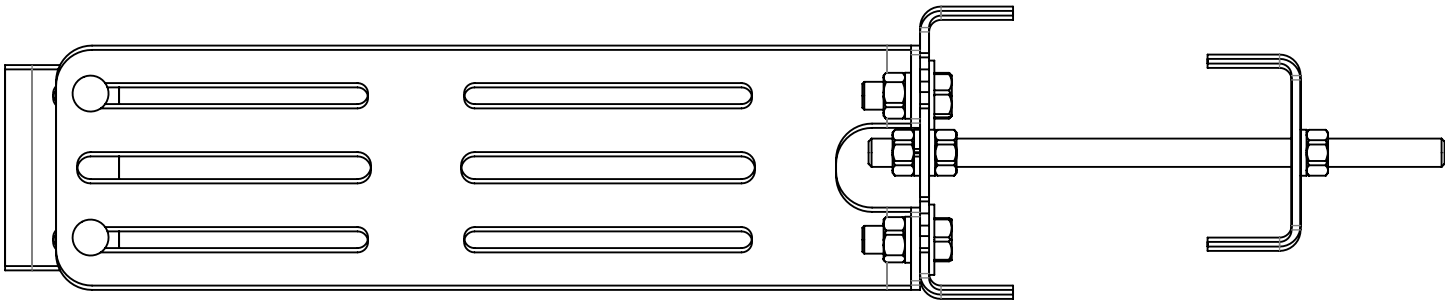


- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 2.1 MOUNT WILL FIT LEGS UP TO:
- 2.1.1 Ø 5.6" ROUND
- 2.1.2 6.0" 60° ANGLE
- 2.1.3 4.5" 90° ANGLE
- 2.2 PRE-ASSEMBLE EQUIPMENT TO HANGER BRACKETS (ITEM 2).
- 2.3 MEASURE DISTANCE BETWEEN HANGER BRACKETS (ITEM 2).
- 2.4 ASSEMBLE BRACKETS ITEMS 1 & 3 TO MAST/MEMBER.
- 2.5 CONFIRM FIT DISTANCE.
- 2.6 WITH ITEMS 4 & 5 LOOSE, SLIDE HANGER INTO POSITION THEN TIGHTEN BOLTS FOR INSTALLATION.
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS 3/8" OR LARGER SECURING FLAT PLATES SNUG TIGHT. TIGHTEN ALL THREADED RODS SNUG TIGHT, WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THREADED ROD.
- 3.2 SNUG TIGHT IS DEFINED AS THE CONDITION OBTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN INSTALLER USING AN ORDINARY SPUD WRENCH TO BRING THE CONNECTED LAYERS (PLIES) OF STEEL INTO FULL CONTACT.
- 3.3 FOR BOLTS IN A PATTERN, TIGHTEN IN A CRISS-CROSS OR STAR SEQUENCE, INCREASING TORQUE IN GRADUAL STEPS UNTIL SNUG TIGHT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED

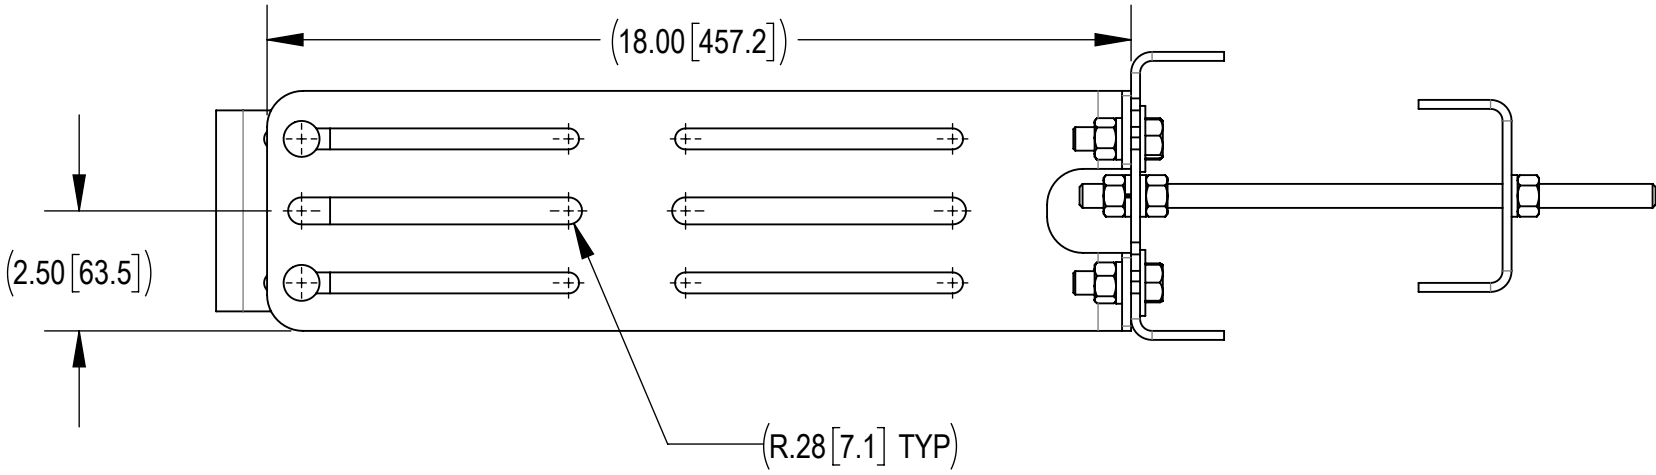

DENSITY	MASS	83.35	lbs/in³
VOLUME	295.60		lbs
SURFACE AREA	3496.70		in³
HEIGHT	30"		in²
LENGTH	8.5"		
WIDTH			

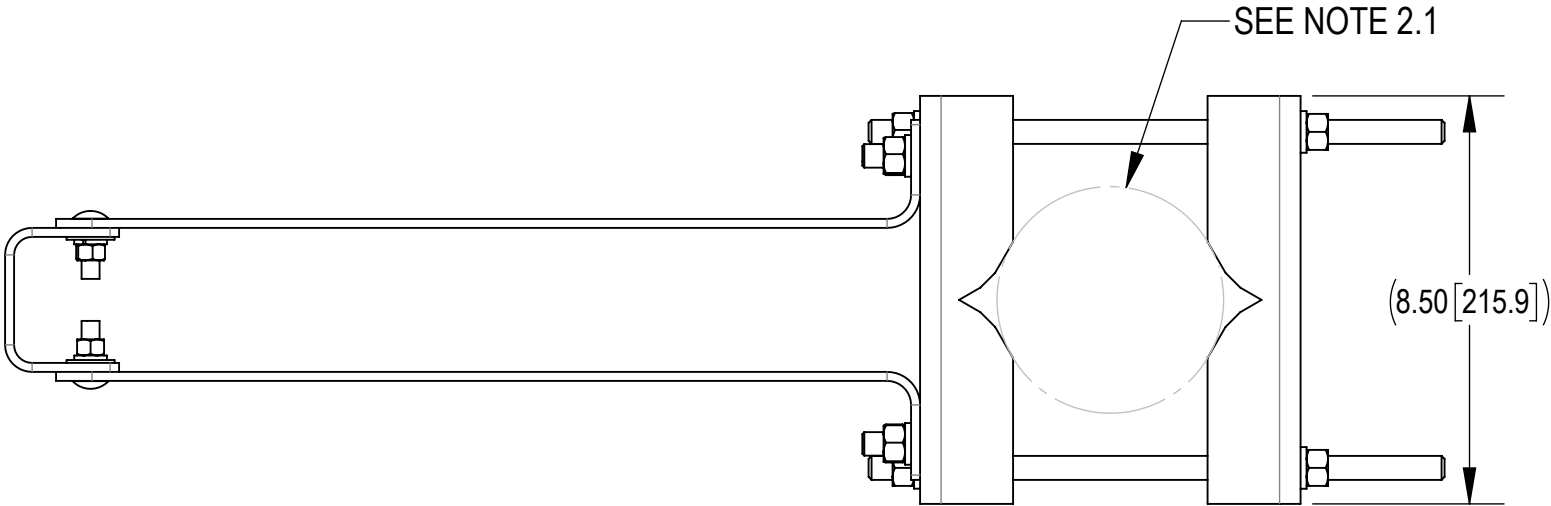

ANDREW® an Amphenol company

TOLERANCES				SAP MATERIAL MASTER									
0 PLACE		X[X] ± 0.25[6.4]		2 PLACE		.XX[X] ± 0.06[1.5]							
1 PLACE		.X[X] ± 0.12[3.0]		ANGLES		± 2°							
FINISH				MATERIAL									
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994				NAME		DATE		TITLE					
				CE RJC		09/12/18							
				RW RY1002		01/13/2026							
				AD YMENG		01/15/2026							
				RE YMENG		01/15/2026							
ECN 50106525AMO				SCALE		DOCUMENT NO.							
				1:4		RR-FA3							
SIZE				Auth Group		INSL		MODEL		DRAWING		SHEET	
C								VERSION		STATUS		REVISION	
				10		RE		E		11		RE	
												1 OF 3	


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	RJC 09/18/18	8000031586
B	ADDITIONAL DIPLEXER/ EQPT BRACKET	FA 1/30/2019	8000033697
C	ADDED RRFA-0001-00, RRFA-0002-00 FOR STABILIZING	RJC 07/01/19	8000036136
D	REMOVED RRFA-002-00 FROM ASSY	RJC 11/20/19	8000037958
E	UPDATED DRAWING TO NEW FORMAT	RY1002 12JAN26	BA1025 50106525AMO

D

C

B

A

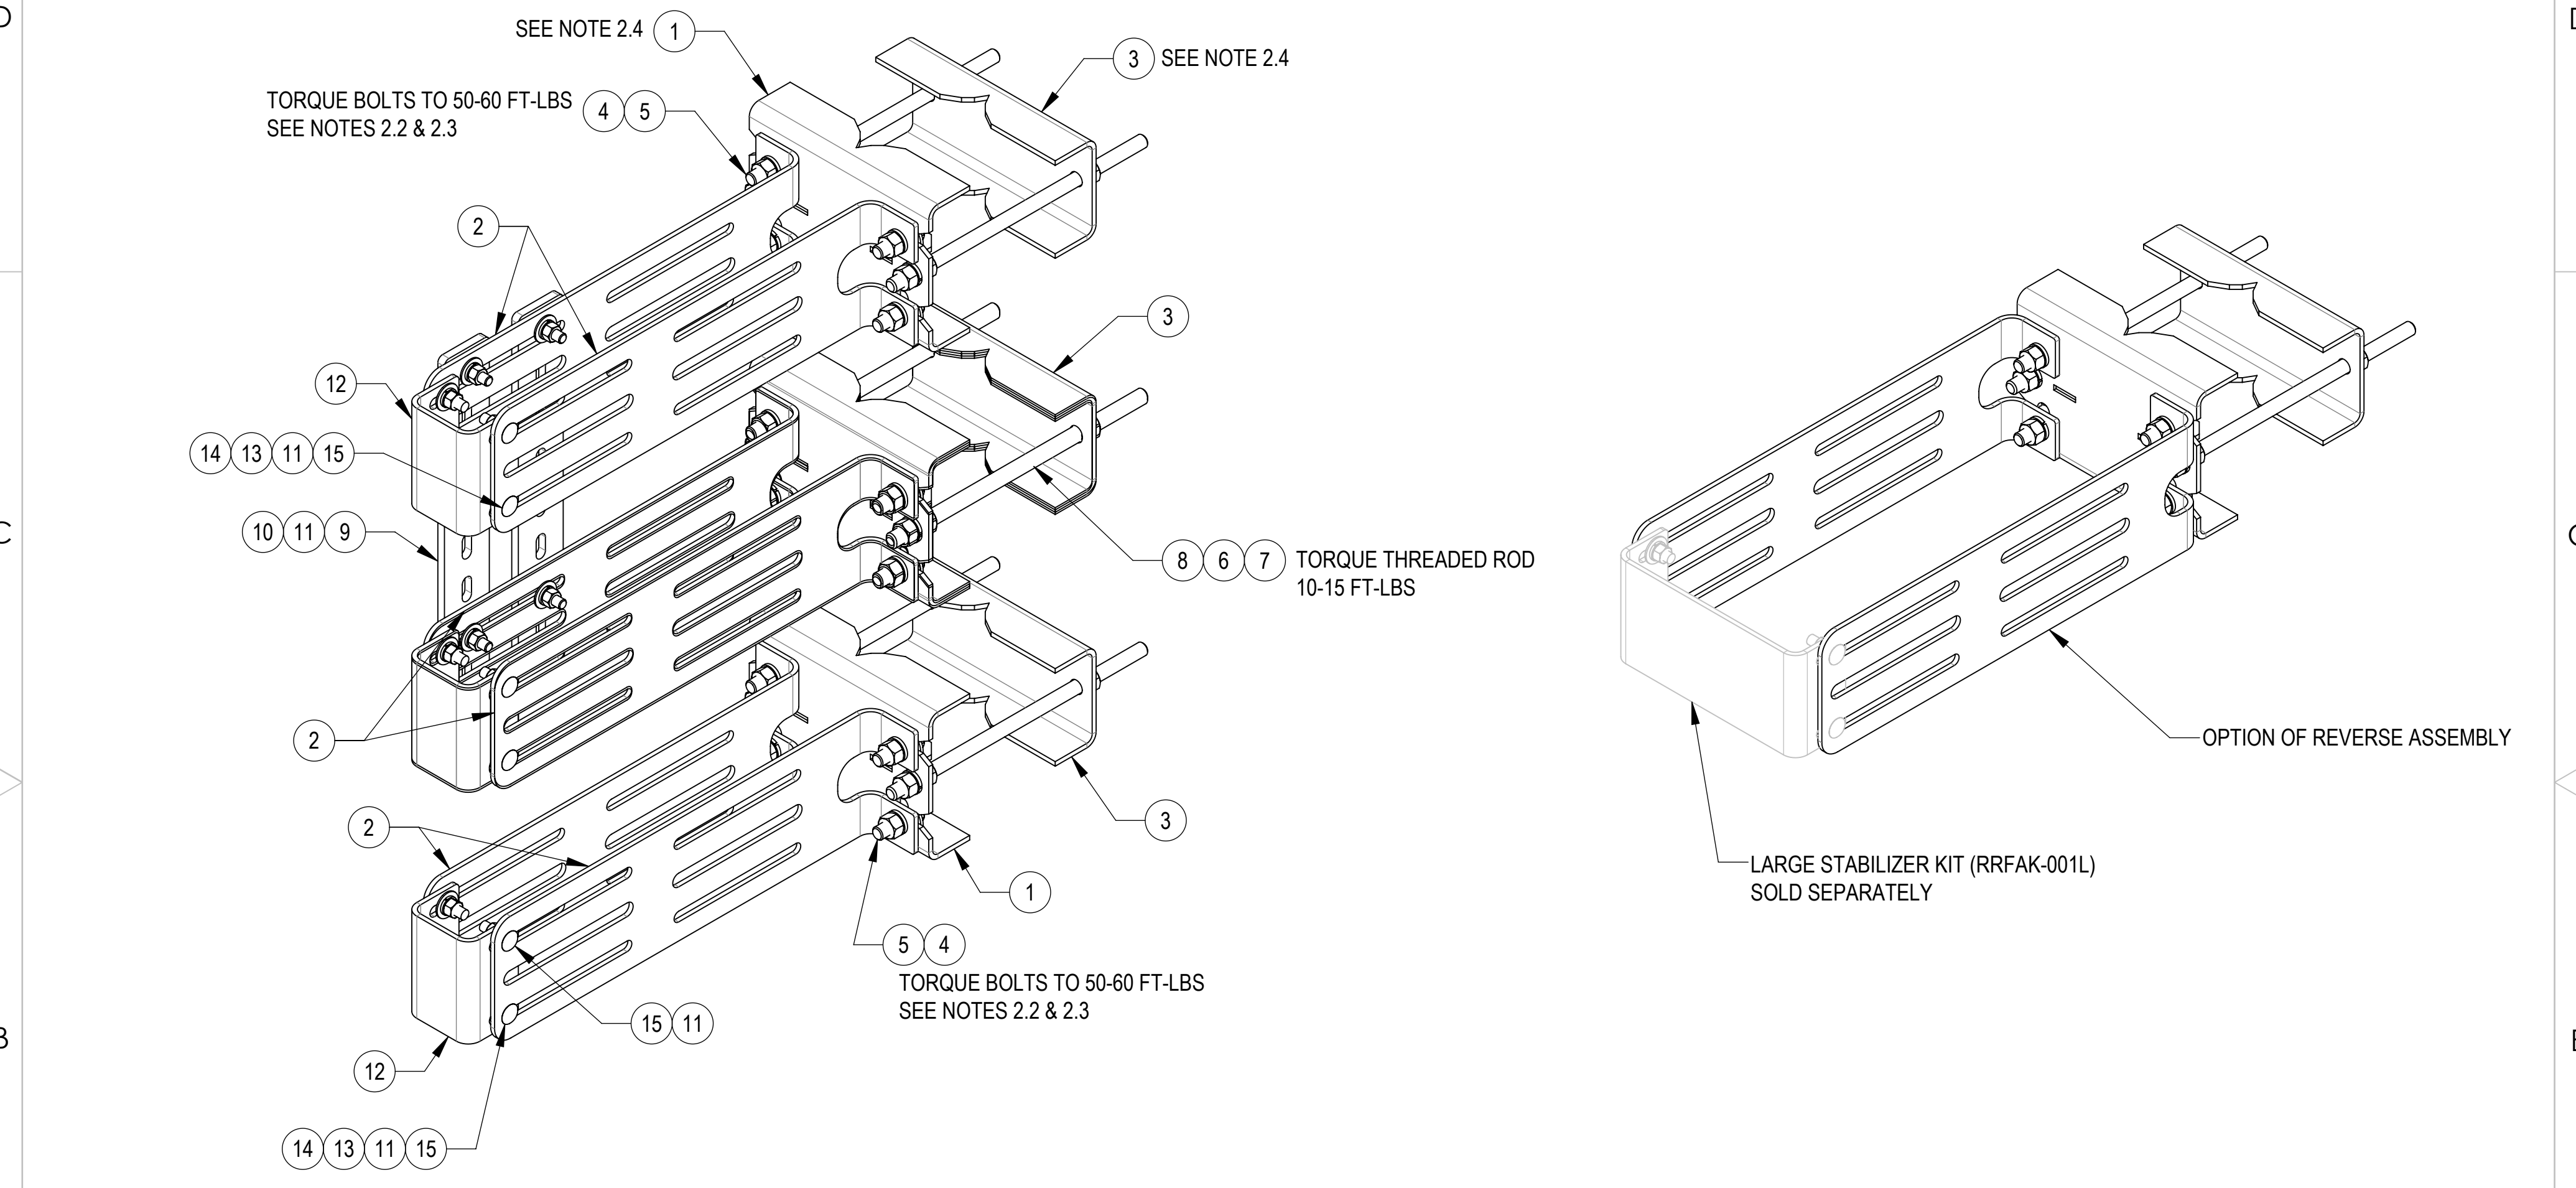

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	MTC378912	WELDED FRONT BRACKET	4	4.18 LBS	
2	MTC378909	RRU HANGER	8	3.97 LBS	
3	MTC378903	REAR BRACKET	4	3.10 LBS	
4	GWLF-04	1/2" GALV FLAT WASHER	16	0.04 LBS	
5	GB-04145	1/2" X 1-1/2" GALV BOLT KIT	16	0.13 LBS	
6	GWL-04	1/2" GALV LOCK WASHER	24	0.01 LBS	
7	GN-04	1/2" GALV HEX NUT	24	0.04 LBS	
8	MT-379	1/2" X 12" GALV THREADED ROD	8	0.66 LBS	
9	MTC378917	DIPLEXER/EQPT MNT BRKT	2	2.45 LBS	
10	GB-03145	3/8" X 1-1/2" GALV BOLT KIT	4	0.07 LBS	
11	GWLF-03	3/8" GALV FLAT WASHER	16	0.01 LBS	
12	RRFA-0001-00	BRACKET, RRU MOUNT SMALL STABILIZER	3	1.46 LBS	
13	GWL-03	3/8" GALV LOCK WASHER	12	0.01 LBS	
14	GN-03	3/8" GALV HEX NUT	12	0.02 LBS	
15	MTC8196	3/8 X 1-1/4" CARRIAGE BOLT	12	0.05 LBS	

Confidential



TITLE
FAST ACCESS TRIPLE RRU MOUNT


SIZE
C

SCALE
1:4

DOCUMENT NO.
RR-FA3



DRAWING			SHEET 2 OF 3
VERSION	STATUS	REVISION	
11	RE	E	

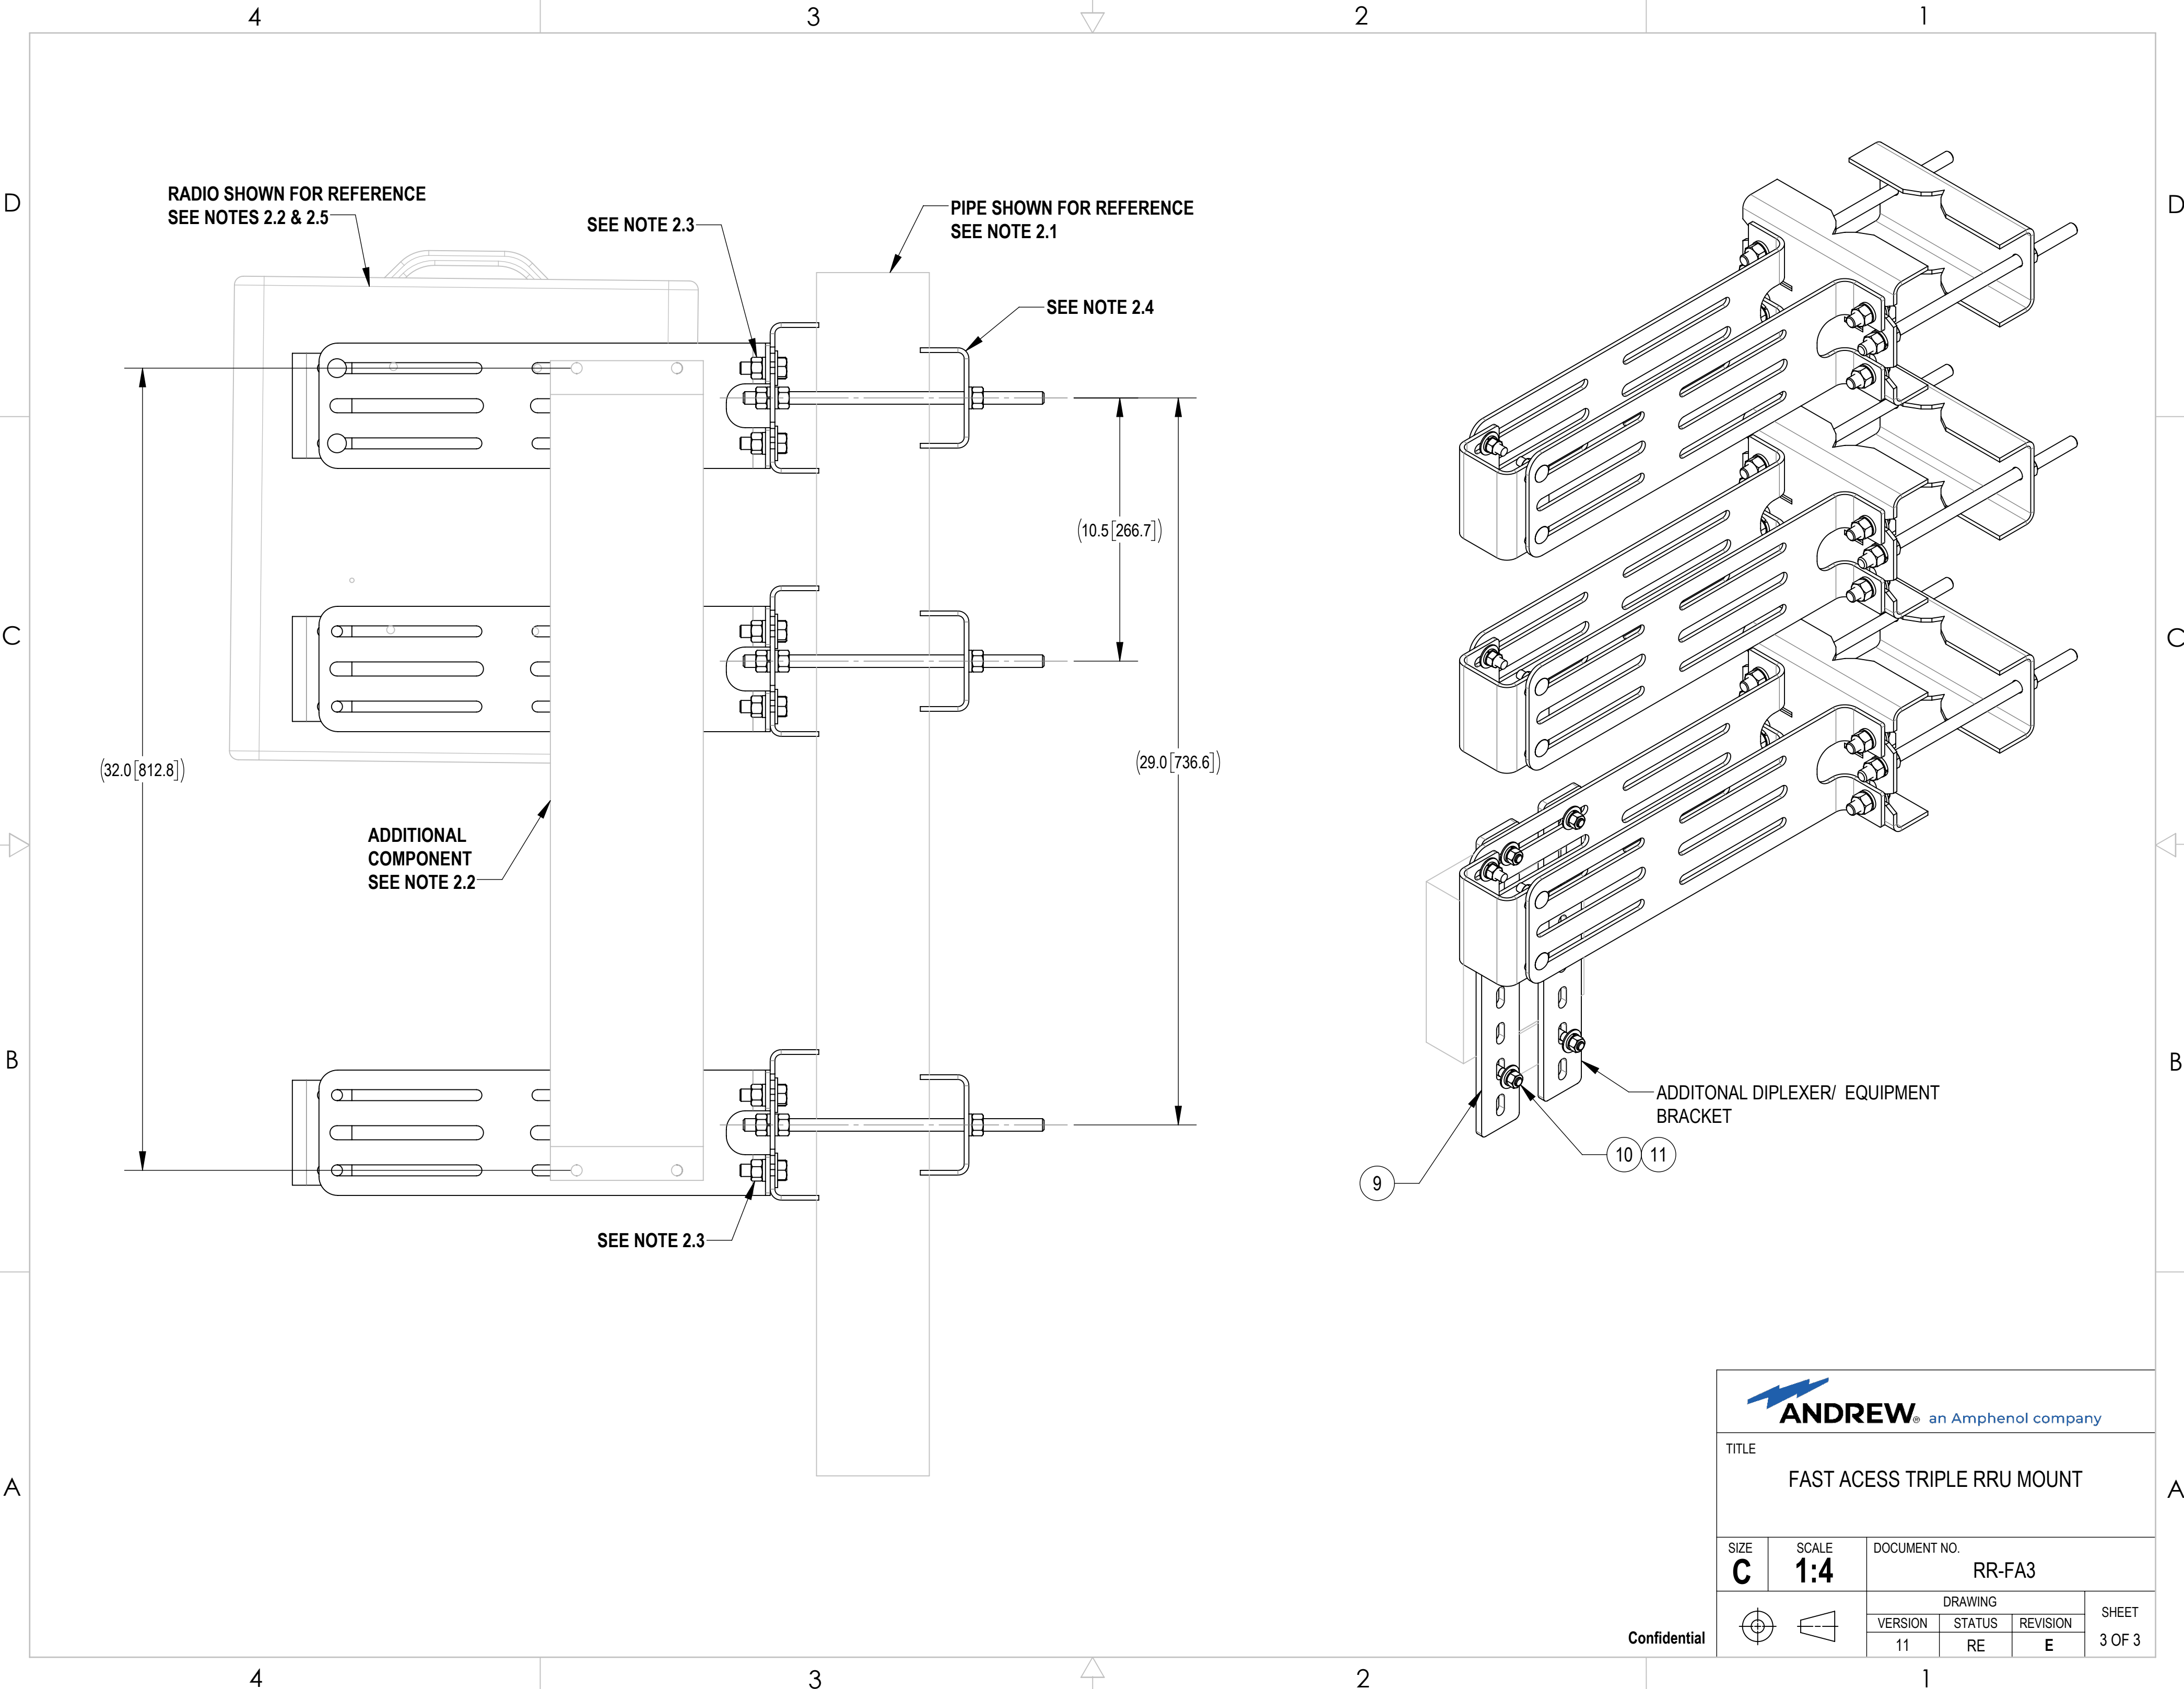

				
TITLE FAST ACESS TRIPLE RRU MOUNT				
SIZE C	SCALE 1:4	DOCUMENT NO. RR-FA3		
 	DRAWING			SHEET 3 OF 3
	VERSION 11	STATUS RE	REVISION E	

Confidential