



- 4
- 3
- 2
- 1
- 1.0 GENERAL NOTES
- 1.1 ALL METRIC DIMENSIONS ARE IN BRACKETS [X. X]
- 1.2 FOR PATENT INFO: <https://www.adwpat.com>
- 2.0 DESIGN NOTES
- 2.1 ANY HAZARDS OR OBSTRUCTIONS TO THE CLIMBING FACILITY AND SAFETY CLIMB MUST BE IDENTIFIED PRIOR TO INSTALLING THE APPURTENANCE. ADDITIONAL PRODUCTS MAY BE REQUIRED TO MAINTAIN THE INTEGRITY OF THE SAFETY CLIMB. DURING INSTALLATION, TEMPORARY AND/OR PERMANENT PRECAUTIONARY MEASURES SHOULD BE TAKEN TO PRESERVE THE CLIMBING FACILITY AND/OR SAFETY CLIMB.
- 3.0 MANUFACTURING/SPECIAL REQUIREMENTS
- 3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND EQUAL FORCE ON EACH LEG OF THE U-BOLT.
- 4.0 TEST
- 5.0 PACKAGING
- 5.1 PACKAGING SHALL MEET ANDREW REQUIREMENTS PER DOCUMENT IS-PL-3005
- 5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
- 5.3 EXTRA HARDWARE MAY BE SUPPLIED, BAGGED AND SHIPPED



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	MSM 23AUG12	TP
B	UPDATED DRAWING FORMAT TO NEW	JJ1095 09SEP25	BA1025 50104850AMO

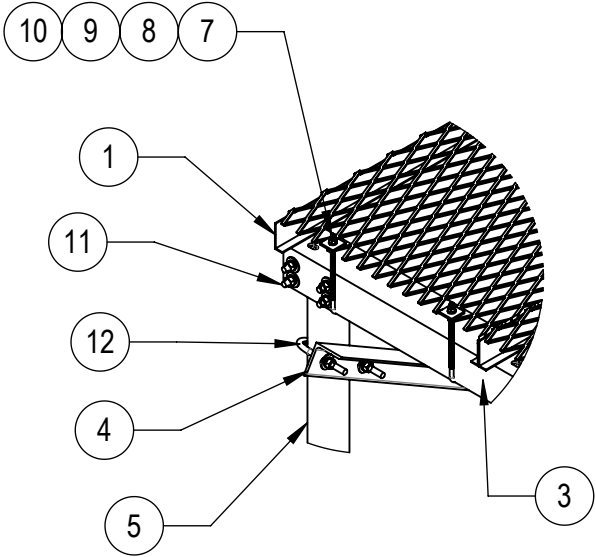




DETAIL A
SCALE 1 : 16

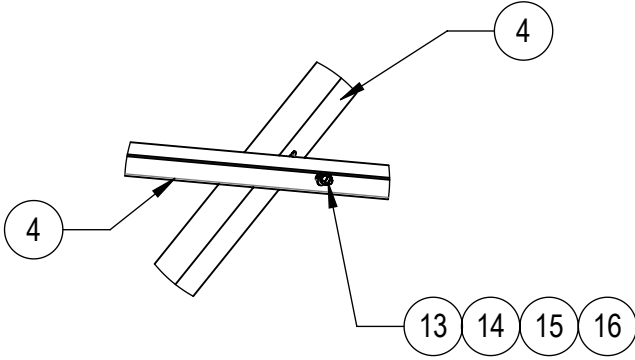

DETAIL B
SCALE 1 : 16

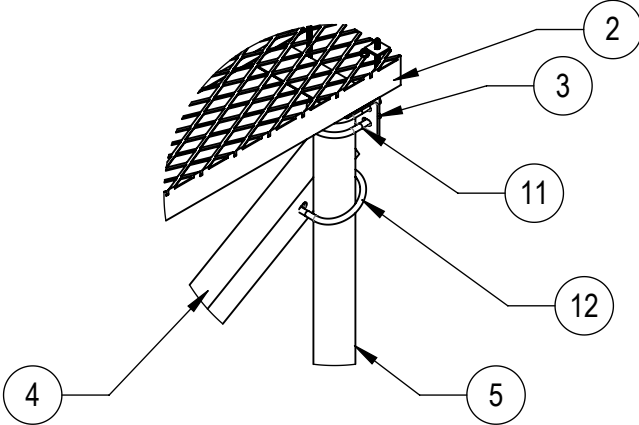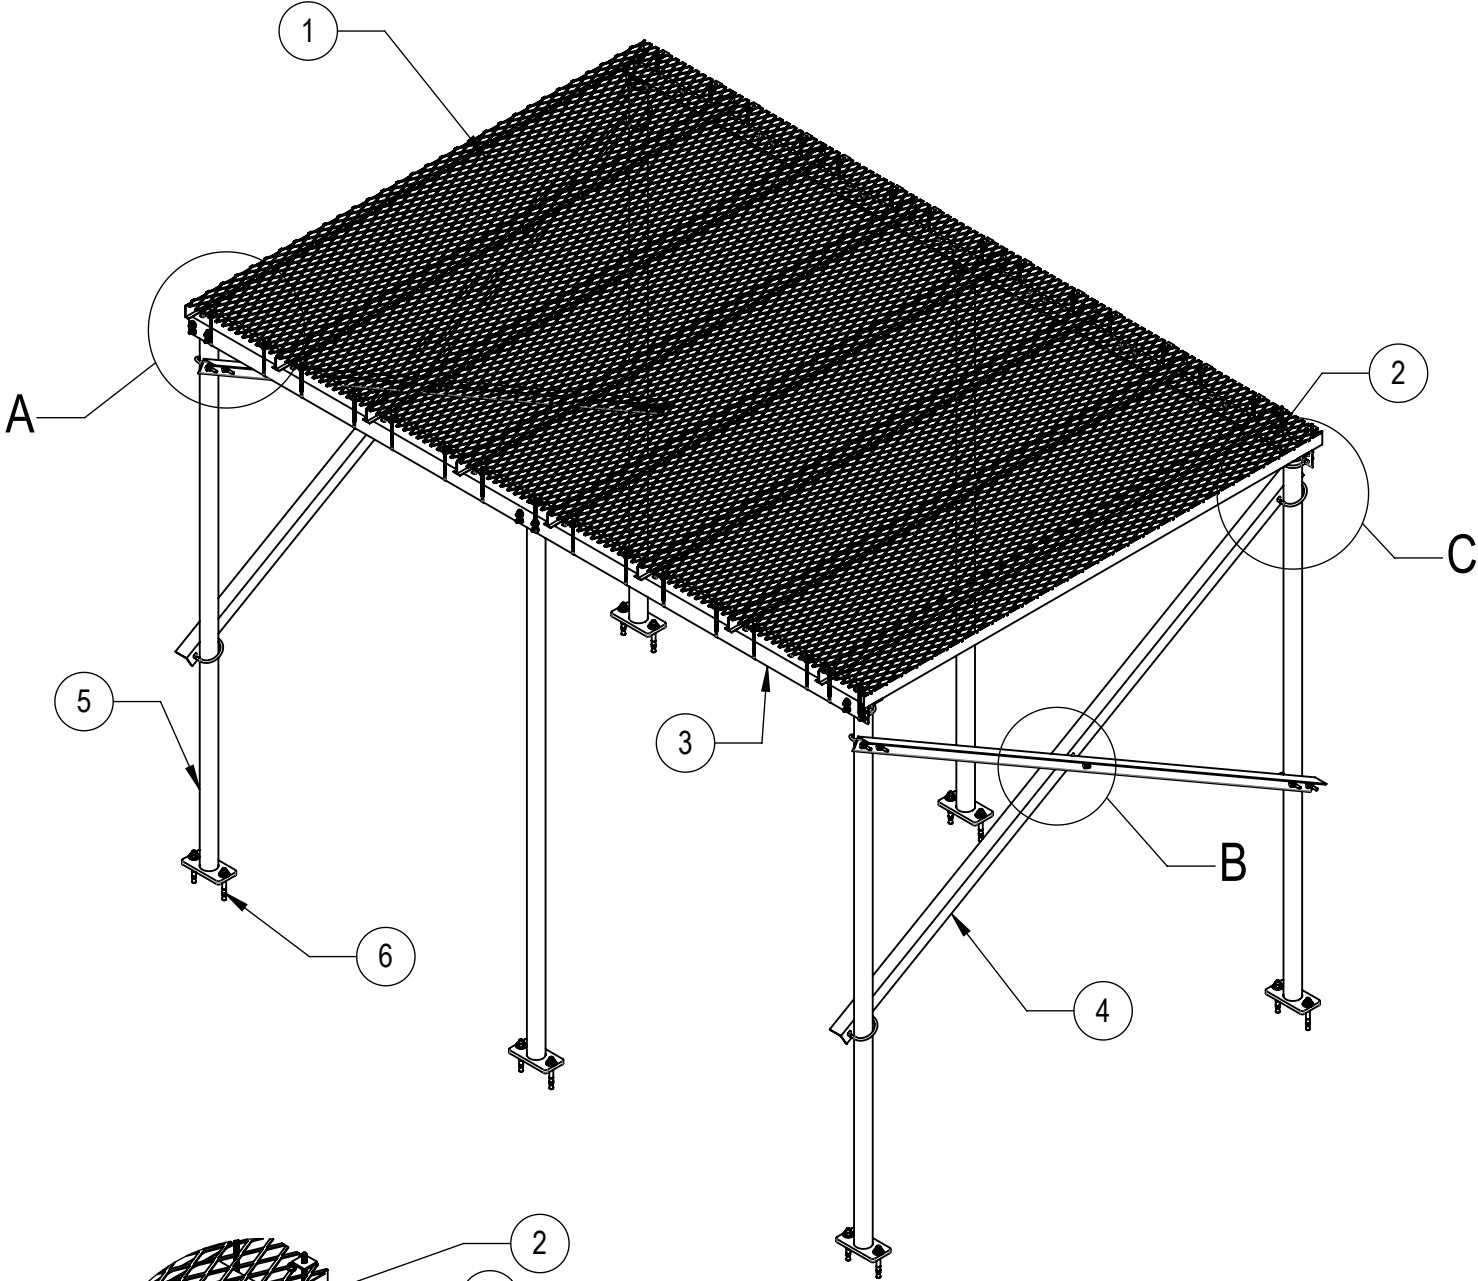

DETAIL C
SCALE 1 : 16

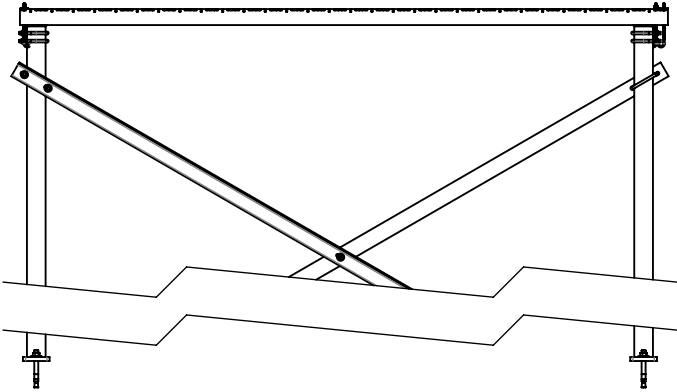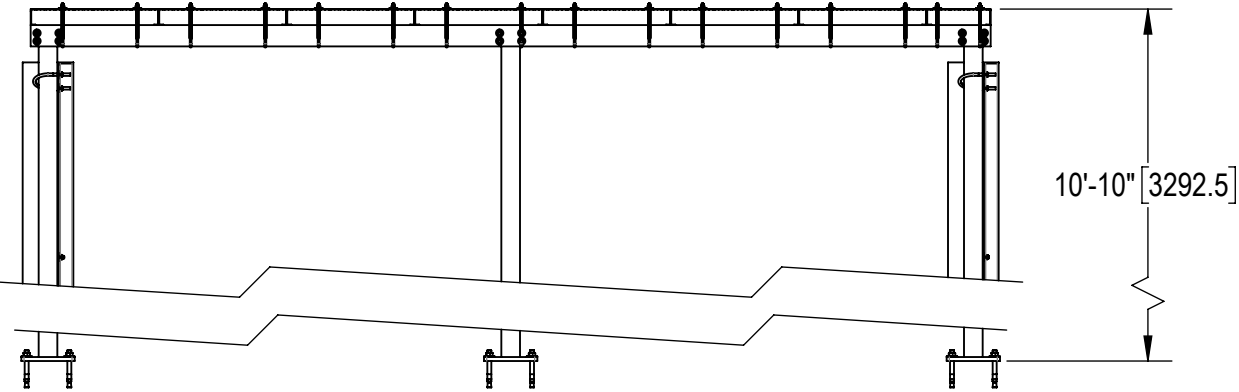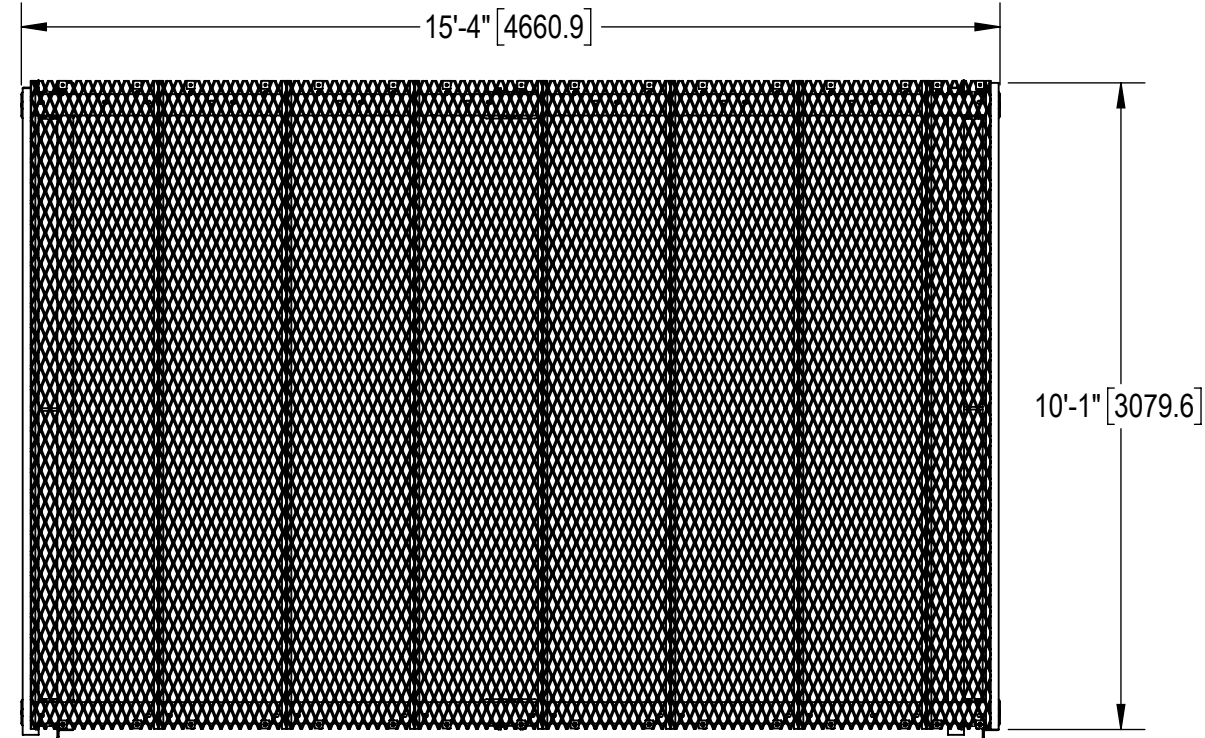

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM	PART NO.	DESCRIPTION	QTY.	WEIGHT	NOTE NO.
1	WB-CY210	SAFETY GRATED WAVEGUIDE BRIDGE CHANNEL	7	49.84 LBS	
2	WB-CY110	SAFETY GRATED WAVEGUIDE BRIDGE CHANNEL	1	37.00 LBS	
3	IC101501	15' ICE SHIELD SUPPORT BRACKET	2	97.47 LBS	
4	IC101502	DIAGONAL SUPPORT	4	56.31 LBS	
5	MF12601	BASE SHOE WELDMENT, 10' 6"	6	53.81 LBS	
6	MT-287	3/4" ANCHOR BOLT	12	1.08 LBS	
7	GJB0380	8" GALV J-BOLT KIT	32	0.23 LBS	
8	MT-387	SQUARE WASHER 1-1/2"X1-1/2" W/ 7/16 HOLE	32	0.11 LBS	
9	GWL-03	3/8" GALV LOCK WASHER	32	0.01 LBS	
10	GN-03	3/8" GALV HEX NUT	32	0.02 LBS	
11	GUB-4355	1/2" X 3-5/8" X 5" GALV U-BOLT	12	0.71 LBS	
12	GUB-4456	1/2" X 4-5/8" X 6-1/2" GALV U-BOLT	8	0.90 LBS	
13	MT-379-6	1/2" X 6" GALV THREADED ROD	2	0.33 LBS	
14	GWF-04	1/2" GALV FLAT WASHER	4	0.04 LBS	
15	GWL-04	1/2" GALV LOCK WASHER	4	0.01 LBS	
16	GN-04	1/2" GALV HEX NUT	4	0.04 LBS	

DENSITY	MASS	1174.05	lbs/in³
VOLUME	4144.79	in³	
SURFACE AREA	62266.79	in²	
HEIGHT	183.5"		
LENGTH	123.1"		
WIDTH	135.6"		

Confidential

ANDREW[®] an Amphenol company									
TOLERANCES						SAP MATERIAL MASTER			
1 PLACE .X[X] ± 0.2[6.3]			3 PLACE .XXX[X] ± 0.060[1.5]			IC-1015-S			
2 PLACE .XX[X] ± 0.12[3.0]			ANGLES ± 2°						
FINISH					MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES INTERPRET PER ANSI Y 14.5M-1994		NAME	DATE	10' X 15' ICE CANOPY, BASE SHOE					
	CE	MSM	08/23/2012						
	RW	LL1090	09/24/2025						
									
	AD	YMENG	09/24/2025	SCALE 1:36	DOCUMENT NO. IC-1015-S				
	RE	YMENG	09/24/2025						
	ECN 50104850AMO								
SIZE	Auth Group	INSL	MODEL			DRAWING			SHEET 1 OF 1
C			VERSION 00	STATUS RE	REVISION A	VERSION 01	STATUS RE	REVISION B	